

 **DEMOLITION FLOOR PLAN – MECHANICAL DUCTWORK**
SCALE: 3/16" = 1'-0"


ASBESTOS AND LEAD PAINT NOTE

AN ASBESTOS INSPECTION WAS PERFORMED AND ASBESTOS CONTAINING MATERIALS WERE FOUND GENERALLY IN THE AREAS INDICATED IN THE ASBESTOS SURVEY/INSPECTION REPORT WHICH IS AVAILABLE TO THE CONTRACTOR(S) FOR HIS INFORMATION. ASBESTOS CONTAINING MATERIALS HAVE BEEN REMOVED UNDER A SEPARATE CONTRACT.

A LEAD-BASED PAINT INSPECTION WAS PERFORMED AND LEAD-BASED PAINT WAS FOUND IN THE AREAS INDICATED. THE CONTRACTOR SHALL BE RESPONSIBLE WITH ALL REQUIREMENTS OF THE VIRGINIA OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION REGULATIONS LEAD-BASED PAINT PROTECTION OF WORKERS.


DEMOLITION NOTES THIS SHEET

- 1 REMOVE DUCTWORK, GRILLES, AND DIFFUSERS, INSULATION, HANGERS AND SUPPORTS COMPLETE TO POINT INDICATED. PROVIDE TEMPORARY AIRTIGHT CAPS WHERE DUCT WILL BE RECONNECTED.
- 2 REMOVE HIGH PRESSURE VARIABLE AIR VOLUME BOX AND ASSOCIATED THERMOSTAT AND LINES. SEE NEW WORK ON DRAWING M1.2G.
- 3 REMOVE CEILING MOUNTED UNIT HEATER, HANGERS, AND SUPPORTS.
- 4 REMOVE FLOOR MOUNTED UNIT VENTILATOR. REMOVE EXTERIOR WALL LOUVER. PROVIDE INSULATED SHEET METAL CAP. COORDINATE WITH ARCHITECT.
- 5 REMOVE ROOFTOP EXHAUST FAN AND DUCTWORK COMPLETE. PROVIDE INSULATED SHEET METAL CAP OVER ROOF CURB. CROSS BREAK TO PREVENT OIL PANNING.

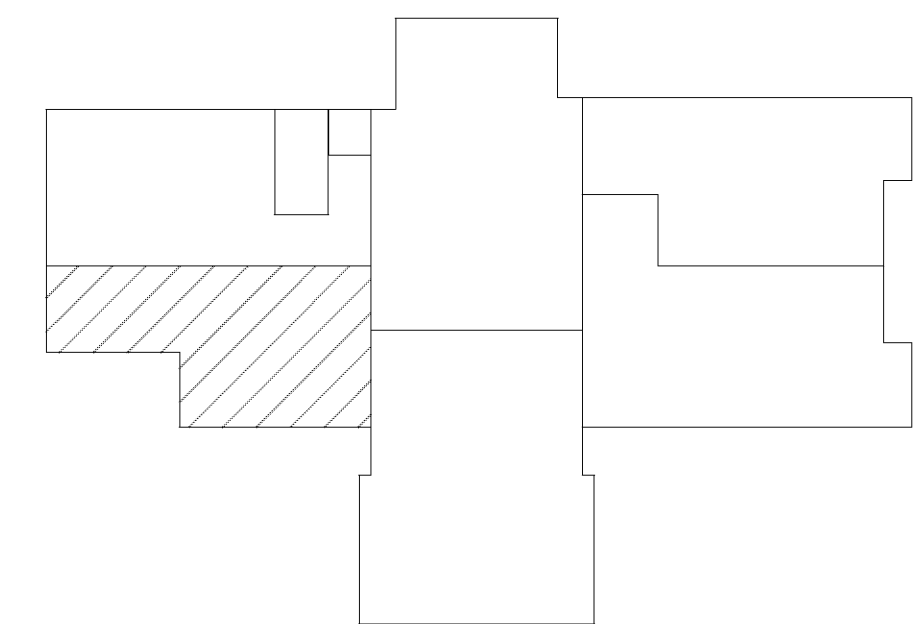

 **KEYPLAN**
NO SCALE

GRAPHIC SCALES

3/16" = 1'-0" 


nbij ARCHITECTURE
A Professional Limited Company



**RAPPAHANNOCK
COMMUNITY COLLEGE**
CAMPUS RENOVATIONS
WARSAW + GLENN, VIRGINIA
PC: 260-17712

**GLENN CAMPUS
DEMOLITION FLOOR
PLAN – MECHANICAL DUCTWORK**

Date:	JANUARY 13, 2010
REVISIONS	
NO.	DATE

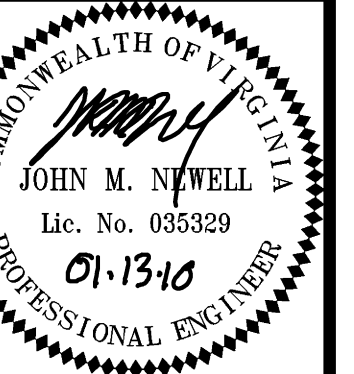

Sheet
MD1.2G
File Number
XX